


MUF - 6 FIBRE OPTIC SPLICE CLOSURE WITH ADAPTER PLATE

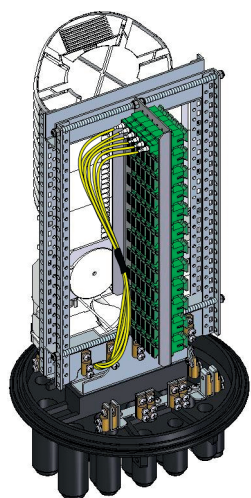

Cable organisation in MUF-6 with adapter plate

FEATURES:

- fibre optic splice closure dedicated for underground and aerial applications
- splice capacity - 72 fibres, adapter capacity - 72
- tray capacity: up to 12 dedicated splice trays
- max 12 splices per tray
- glass fibre reinforced, UV stabilised plastic cap
- possibility of storing reserves of uncut, loose loops of feeder cable tubes
- the cable ports in the base are environmentally sealed using heatshrink sleeves or self-amalgamating mastic (optional)
- possibility of mounting the closure with OH-3 bracket or mounting plate
- comply with the standard: ZN-OPL-008/14
- recommended cable retention frames:
 - SZ-3 (wooden poles)
 - SZ-2 (telecommunication manholes)

EQUIPMENT:

- splice enclosure
- dedicated splice trays
- heatshrink sleeves
- cable ties
- mounting holder
- adapter plate, patching field
- installation kit

OPTIONAL EQUIPMENT:

- fibre manifold R-06
- OH-3 bracket or OH-3K
- self-amalgamating mastic
- minicable holder