


BPK-19 19" DISTRIBUTION PANEL



BPK-19 19" Distribution Panel

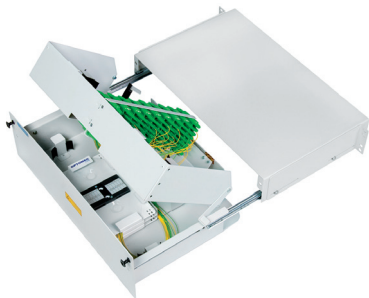

BPK-19 19" Distribution Panel

FEATURES:

- most commonly used for splicing fibres in outdoor cables with pigtails, with possibility of connection pigtail - pigtail and pigtail - patchcord
- tilting shelf with front panel for 24 or 72 adapters of E2000 or SC adapters
- possibility of using LC Duplex adapters
- splices trays KS-24 or KSH
- cable protection and safe bending radius when the panel is down-out and in
- front or rear fixing in the 19" rack
- indoor cable bundles coming out of the panel
- managed with the protective conduits
- installation in 19" racks with minimum depth of 300 mm, e.g. STP-19
- installation in 21" and/or 23" racks with the use of AD-19 adapters

THE SET INCLUDES:

- adapter plate, cable protective conduit
- cable organisers and cable ties
- installation and handling instructions
- installation kit
- splice trays

TECHNICAL SPECIFICATIONS:

	BPK-19/24/1	BPK-19/24/2	BPK-19/72/1	BPK-19/72/2
number of splice trays	2 x KSH		3 x KS-24	
maximum number of splices	24		72	
adapter capacity	24		72	
connector standard	E-2000, SC, LC			
recommended pigtail length [m], 0.9 mm buffered fibre	1,5			
number of outdoor cable entries	1			
dimensions: width/height/depth [mm]	483/44(1U)/280		483/132(3U)/280	
weight [kg]	1,9		3,5	
mounting brackets position	front	front	front	front

ORDERING:

BPK-19/24/1 - 19" Patch Panel, capacity 24xE-2000/SC adapters, front fixing