

## PS-5 FIBRE OPTIC DISTRIBUTION BOX

## FEATURES:

- wall mounted in controlled environments
- termination of up to 24 fibres, 4 cable entries
- uncut fibre loops storage
- full front access to splice trays and adapter plate

## THE SET INCLUDES:


- separate adapter plate protection lid (option)
- splice tray KS-3E, cable organisers
- cable ties, cable rubber glands
- installation and handling instructions
- installation kit

## TECHNICAL SPECIFICATIONS:

	PS-5/12	PS-5/24
number of splice trays		1 x KS-24
maximum number of splices		24
adapter capacity	12	24
connector standard	E-2000, SC, FC, ST, LC	
recommended pigtail length [m], 0.9 mm buffered fibre	2	
recommended pigtail length [m], 2 mm cable diameter	1,5	
number of outdoor cable entries	4	
maximum diameter of input cable [mm]	14	
dimensions: width/height/depth [mm]	250/400/100	
weight [kg]	3	
housing material/colour	steel sheet/RAL 7035	
mechanical protection IK	IK 08	
environmental protection IP	IP51	

## ORDERING:

PS-5/24/P/K/24E2A wall mounted Fibre Optic Distribution Box equipped with 24 pigtails and 24 E2000/APC adapters

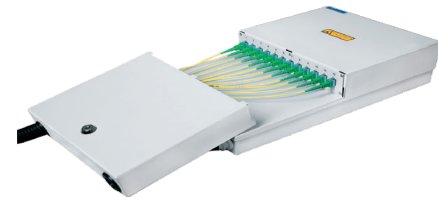

*Fibre Optic Distribution Box  
PS-5/24/P with adapter plate lid*